



A PC spike dripper with turbulent flow path, sealed to maintain pre-set discharge rates and uniformity. A nursery and landscape spike dripper that delivers precise amounts of water direct to the plant root zone.

Features

- Registered design.
- Three colour coded flow rates: 2 lph, 4 lph & 8 lph.
- Turbulent flow path and self-flushing action with insect baffle to minimise blockages.
- Inlet barb has built-in filter.
- Outlet suitable for attaching 4 mm micro tube.
- UV stabilised materials for long life.

Applications

Nurseries, shade houses, tree lots and landscape applications.



Performance	DISCHARGE (lph)		
	2 lph	4 lph	8 lph
PRESSURE (kPa)			
50	2.0	3.6	5.8
100	2.3	4.3	7.8
150	2.3	4.4	8.0
200	2.3	4.6	8.2
250	2.3	4.7	8.3
300	2.3	4.7	8.2
350	2.2	4.6	8.0
MINIMUM CROSS SECTION (mm)	0.7 x 0.6	0.8 x 0.8	1.2 x 0.9

* C_v for all Asta Drip® emitters conforms to ISO 9261

Asta® Drip
PC 2 lph
Spike 4 mm




Asta® Drip
PC 4 lph
Spike 4 mm



Asta® Drip
PC 8 lph
Spike 4 mm

Discharge Rate: Asta® Drip PC

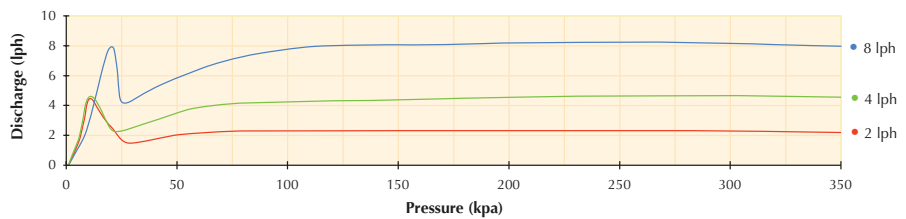

Asta® Drip PC

NOMINAL FLOW	BASE COLOUR	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
2 lph	Red	30735	25	50	7.2
4 lph	Black	30745	25	50	7.2
8 lph	Green	30755	25	50	7.2

Specifications

DIMENSIONS ASSEMBLED		UV STABILISED MATERIAL		BASE/CONNECTION TYPE	
HEIGHT	144 mm	SPIKE	polypropylene	Inlet: BARB	4 mm
WIDTH	33 mm	BASE	polypropylene	Outlet: SPOUT	4 mm
DEPTH	17 mm	DIAPHRAGM	silicone rubber		
WEIGHT (approx)	4.5 g				